

APC Sentry II Thermocouples with Thermo-Guards have one coat of refractory-saturated white glass and two coats of refractory-saturated, tight-weave fiberglass over 11/16" tubing with silicon carbide tips.

Advance[®] consumables

Thermocouples

APC Sentry II Thermocouples with Thermo-Guards have:

One coat of refractory saturated white glass and two coats of refractory saturated, tight-weave fiberglass over 11/16" tubing with silicon carbide tips.


Thermo-Guards protect the Thermocouples.

Advantages Include:

Longer Life - The refractory surface of the *Thermo-Guard* resists erosion by molten aluminum up to temperatures of 1400°F. No additional coatings are required to prolong useful life.

Savings On Man-Hours and Materials - Longer tube life means longer thermocouple life and less man-hours for maintenance.

Standard features include 3/4" NPT, 20 gauge Type K wire, and three foot leads.

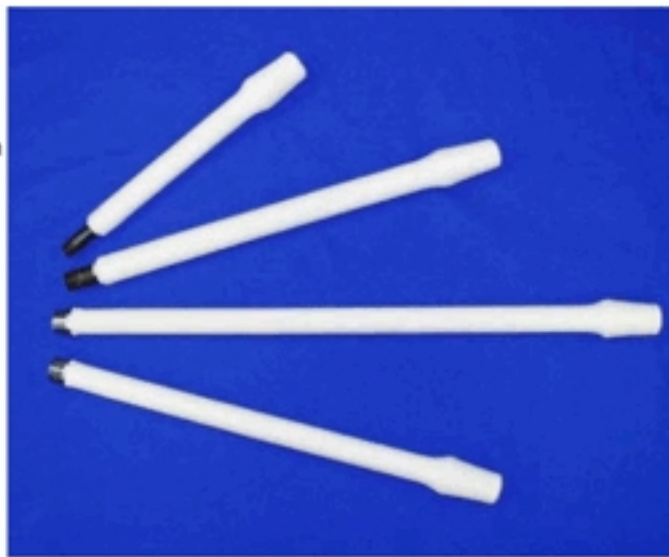

Length	12"	18"	24"	30"	36"	42"	48"
APC Sentry II w/Thermocouple	#8924-12	#8924-18	#8924-24	#8924-30	#8924-36	#8924-42	#8924-48

Your "Window to the World"[™] of Die Casting Automation and Consumable Products

Advance

Advance Products Corporation - 2527 M-63 Benton Harbor, Michigan 49022
Phone (269) 849-1000 - Fax (269) 849-2200 - www.advanceproductscorp.com

©Advance Products Corporation
Printed in U.S.A.
APC-100-0002